


Full Lined Diaphragm Valve

Product Description

Name	Description
Model	G41F4-10/16
Name	Full Lined Diaphragm Valve
Size	DN15-DN250
Pressure	PN10/16
Temp.	-20~150°C
Suitable Medium	Water, weak acid and alkali, air, steam, oil, etc.
Body	WCB/CF3/CF3M/CF8/CF8M
Diaphragm	F46/F4/PFA
Bonnet	WCB/CF3/CF3M/CF8/CF8M
Shaft	2Cr13/SS304/316
Actuator	QT450

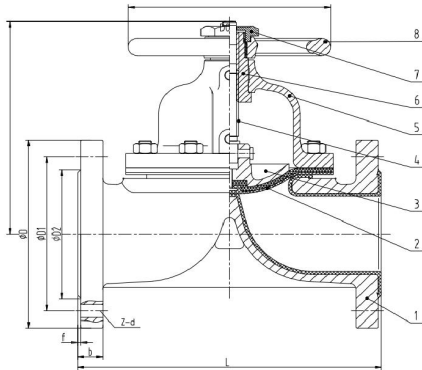

Executive Standard

Name	Standard
Design and Manufacture	GB/T 12235
Face to face Length	GB/T 12221-2008
End Flange	GB/T 9113-2010, EN1092-1
Pressure Test	GB/T 13927-2008

Dimensions

DN	NPS(Inch)	L	PN10				PN16			
			D	D1	D2	Z-d	D	D1	D2	Z-d
15	1/2"	125	95	65	45	4-14	95	65	45	4-14
20	3/4"	135	105	75	55	4-14	105	75	55	4-14
25	1"	145	115	85	65	4-14	115	85	65	4-14
32	1-1/4"	160	140	100	75	4-18	140	100	75	4-18
40	1-1/2"	180	150	110	85	4-18	150	110	85	4-18
50	2"	210	165	125	100	4-18	165	125	100	4-18
65	2-1/2"	250	185	145	120	4-18	185	145	120	4-18
80	3"	300	200	160	135	8-18	200	160	135	8-18
100	4"	350	220	180	155	8-18	220	180	155	8-18
125	5"	400	250	210	185	8-18	250	210	185	8-18
150	6"	460	285	240	210	8-23	280	240	210	8-23
200	8"	570	340	295	265	8-23	340	295	265	12-23
250	10"	680	395	350	320	12-23	405	355	320	12-26