

GB Standard Resilient Seat Gate Valve


Product Description

Name	Description
Model	Z(5/9)45X-10/16, Z(5/9)41X-10/16
Name	GB Standard Resilient Seat Gate Valve
Size	DN40-DN1000
Pressure	PN10/16
Temp.	-20~120°C
Suitable Medium	Freshwater, sea water, sewage, weak acid base, air, steam etc.
Body	DI
Seat Seal	NBR/EPDM
Disc	DI+NBR/DI+EPDM
Shaft	2Cr13
Actuator	Handwheel/Gearbox/Electric/Pneumatic




Executive Standard

Name	Standard
Design and Manufacture	CJ/T216
Face to face Length	GB/T12221
End Flange	GB/T17241.6
Pressure Test	CJ/T216

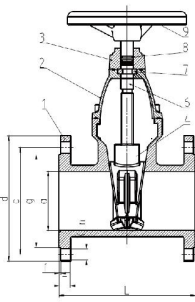

DN40-DN600

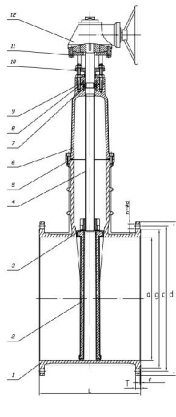

DN700-DN1000

Dimensions

Size		L	d		c		g		f	n-Ød		T	
DN	NPS(Inch)		PN10	PN16	PN10	PN16	PN10	PN16		PN10	PN16	PN10	PN16
40	1-1/2"	165	150	150	110	110	84	84	3	4-19	4-19	19	19
50	2"	178	165	165	125	125	99	99	3	4-19	4-19	19	19
65	2 1/2"	190	185	185	145	145	118	118	3	4-19	4-19	19	19
80	3"	203	200	200	160	160	132	132	3	8-19	8-19	19	19
100	4"	229	220	220	180	180	156	156	3	8-19	8-19	19	19
125	5"	254	250	250	210	210	184	184	3	8-19	8-19	19	19
150	6"	267	285	285	240	240	211	211	3	8-23	8-23	19	19
200	8"	292	340	340	295	295	266	266	3	8-23	12-23	20	20
250	10"	330	395	405	350	355	319	319	3	12-23	12-28	22	22
300	12"	356	445	460	400	410	370	370	4	12-23	12-28	25	25
350	14"	381	505	520	460	470	429	429	4	16-23	16-28	25	27
400	16"	406	565	580	515	525	480	480	4	16-28	16-321	25	28
450	18"	432	615	640	565	585	530	548	4	20-28	20-31	26	30
500	20"	457	670	715	620	650	582	609	4	20-28	20-34	27	32
600	24"	508	780	840	725	770	682	720	5	20-31	20-37	30	36
700	28"	610	895	910	840	840	794	794	5	24-31	24-37	33	40
800	32"	660	1010	1025	950	950	901	901	5	24-34	24-40	35	43
900	36"	711	1115	1125	1050	1050	1001	1001	5	28-34	28-40	38	47
1000	40"	811	1230	1255	1160	1170	1112	1112	5	28-37	28-48	40	50